


DRY Kit POLIESTER

PIECE	COMPOSITION
Roof	Polyester with reinforcement
Doors	30mm Sandwich panel
Sides	Polyester with reinforcement
Frontal	Polyester with reinforcement

AVAILABLE MEASUREMENTS

Length	2.500	6.000 mm
Width	1.800	2.550 mm
Height	1.600	2500 mm

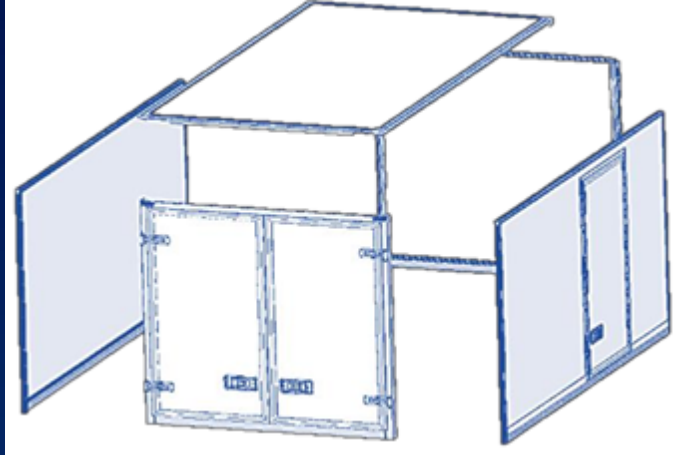

Standard Equipment

- Shine finish stainless rear frame
- RAL 9016 white lacquered profiles
- Stainless ironwork
- Bolt embedded in doors
- Polyester roof with reinforcements

Optional equipment

- Front and rear clearance lights
- Galvanized profiles (Different heights)
- Aluminum profiles (Different heights)
- Lashing bands
- Leaning box over cabin (Fixed / Folded)
- Straight box over the cabin (Fixed / Folded)
- Side doors
- Different rear frame configurations
- Ceiling lights
- Other options: Consult



Technical support

We have a wide commercial network at your entire disposal to offer you immediate advice on both configuration and assembly.



Quality control

Our kits are developed and manufactured under the regular quality standards of TecnoVe Fiberglass, leader in sandwich paneling.



Term & Distribution

Thanks to our infrastructure, we can offer a short manufacturing and delivery time, generating a continuous and solid supply chain.

TECNOVE

Fiberglass