


DRY Kit SANDWICH 30 mm

PIECE	COMPOSITION
Roof	Polyester with reinforcement
Doors	30mm Sandwich panel
Sides	30mm Plywood panel
Frontal	30mm Plywood panel

AVAILABLE MEASUREMENTS

Length	2.500	13.600 mm
Width	1.500	2.550 mm
Height	1.500	3100 mm

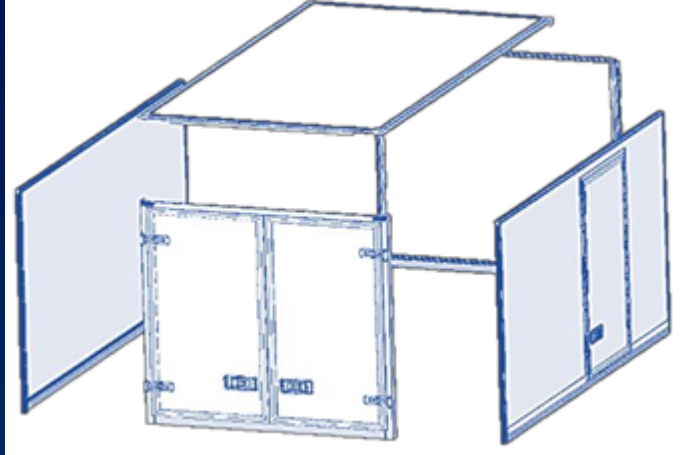

Standard Equipment

Shine finish stainless rear frame
RAL 9016 white lacquered profiles
Stainless ironwork
Bolt embedded in doors
Polyester roof with reinforcements

Optional equipment

Front and rear clearance lights
Galvanized profiles (Different heights)
Aluminum profiles (Different heights)
Lashing bands
Leaning box over cabin (Fixed / Folded)
Straight box over the cabin (Fixed / Folded)
Side doors
Different rear frame configurations
Ceiling lights
Other options: Consult



Technical support

We have a wide commercial network at your entire disposal to offer you immediate advice on both configuration and assembly.



Quality control

Our kits are developed and manufactured under the regular quality standards of TecnoVe Fiberglass, leader in sandwich paneling.



Term & Distribution

Thanks to our infrastructure, we can offer a short manufacturing and delivery time, generating a continuous and solid supply chain.

Calle de los Caleros, 3 13640 Herencia (Ciudad Real)

comercial@tfiberglass.com | www.t fiberglass.com

TECNOVE

Dry Kit is a product

Fiberglass